




## BELLOWS SEALED VALVES SERIES

ANGLE TYPE BELLOWS SEALED  
GLOBE VALVE

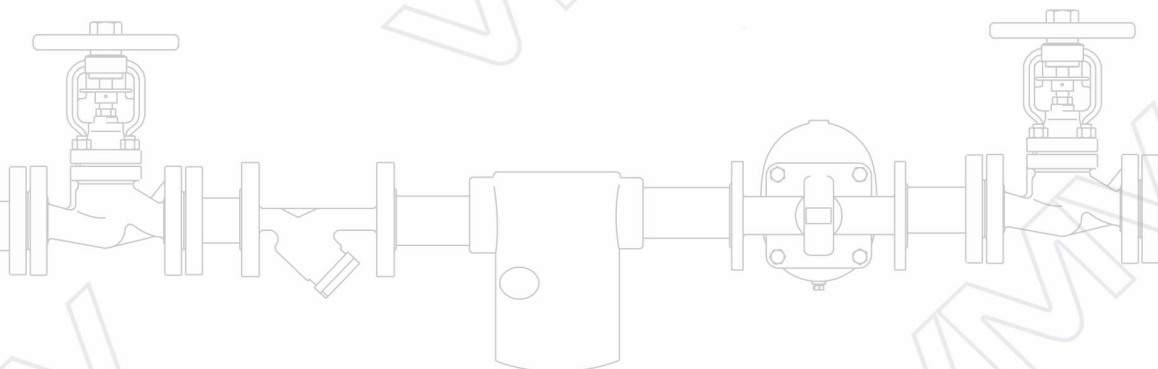

## ANGLE TYPE BELLOWS SEALED GLOBE VALVE

### Product Advantage

- The outlet is 90° right Angle, suitable for installation at the corner of the pipeline system, which can save 90° elbow and save space, easy to operate.
- Double seal design(bellows+packing). Bellows and packing can protect from leakage and provide excellent sealing performance.


- Conical disc design.Benefit from the cone and streamline shape design,the disc can remove the impurities,keep valve in reliable seal and longer service life.

### Specifications

- Design standard: EN12516
- Face to face dimension: EN558
- Flange ends: EN1092-1
- Test & inspection: EN12266

### Application

Thermal oil,Steam,Hot and cold water,Fatty acids, Ammonia, Natural gas, etc.

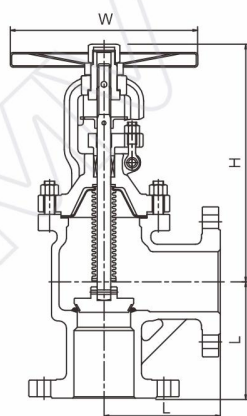

Data Dimension Table

| DN  | PN16 |      |      | PN25 |      |      | PN40 |      |      |
|-----|------|------|------|------|------|------|------|------|------|
|     | L    | W    | H≈   | L    | W    | H≈   | L    | W    | H≈   |
| 15  | 90   | Φ140 | 177  | 90   | Φ140 | 177  | 90   | Φ140 | 177  |
| 20  | 95   | Φ140 | 177  | 95   | Φ140 | 177  | 95   | Φ140 | 177  |
| 25  | 100  | Φ160 | 189  | 100  | Φ160 | 189  | 100  | Φ160 | 189  |
| 32  | 105  | Φ160 | 189  | 105  | Φ160 | 189  | 105  | Φ160 | 189  |
| 40  | 115  | Φ180 | 219  | 115  | Φ180 | 219  | 115  | Φ180 | 219  |
| 50  | 125  | Φ200 | 238  | 125  | Φ200 | 238  | 125  | Φ200 | 238  |
| 65  | 145  | Φ220 | 287  | 145  | Φ220 | 287  | 145  | Φ220 | 287  |
| 80  | 155  | Φ250 | 320  | 155  | Φ250 | 320  | 155  | Φ250 | 320  |
| 100 | 175  | Φ300 | 384  | 175  | Φ300 | 384  | 175  | Φ300 | 384  |
| 125 | 200  | Φ350 | 407  | 200  | Φ350 | 407  | 200  | Φ350 | 407  |
| 150 | 225  | Φ400 | 470  | 225  | Φ400 | 470  | 225  | Φ400 | 470  |
| 200 | 275  | Φ450 | 630  | 275  | Φ450 | 630  | 275  | Φ450 | 630  |
| 250 | 325  | Φ550 | 692  | 325  | Φ550 | 692  | 325  | Φ550 | 692  |
| 300 | 375  | Φ600 | 840  | 375  | Φ600 | 840  | 375  | Φ600 | 840  |
| 350 | 425  | Φ700 | 990  | 425  | Φ700 | 990  | 425  | Φ700 | 990  |
| 400 | 475  | Φ700 | 1100 | 475  | Φ700 | 1100 | 475  | Φ700 | 1100 |



**VMV** Newton Systems®

## **ZHEJIANG NEWTON FLUID CONTROL CO.,LTD.**

### **Headquarters (Wenzhou)**

Zhiyi road, Lingxia industrial zone, Wuniu, Wenzhou,  
Zhejiang, China.

Tel: 86-577-67978269

Fax: 86-577-67376711

E-mail: [vmv@vmv-valve.com](mailto:vmv@vmv-valve.com)

### **Shanghai R&D Center**

Jiading District, Shanghai  
Building 12A, No. 1818 Chengbei Road  
Tel: 86-18057752663

E-mail: [vmv8@vmv-valve.com](mailto:vmv8@vmv-valve.com)

CE  ISO  EAC CCS

[www.vmvvalve.com](http://www.vmvvalve.com)



Scan More Wonderful